


表面安装超快速整流二极管
反向电压 50 --- 600V
正向电流 1.0 A

Surface Mount Super Fast Recover Rectifiers
Reverse Voltage 50 to 600 V
Forward Current 1.0 A

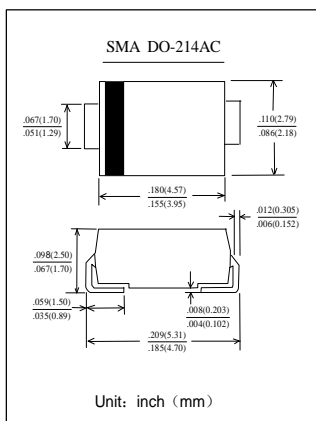

特征 Features

- 低的反向漏电流 Low reverse leakage
- 较强的正向浪涌承受能力 High forward surge capability
- 高温焊接保证 High temperature soldering guaranteed:
250°C/10 seconds at terminals

机械数据 Mechanical Data

- 封装: 塑料封装 Case: Molded plastic body
- 端子: 镀锡 Terminals: Solder plated
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性 TA = 25°C 除非另有规定。

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	ES1A	ES1B	ES1C	ES1D	ES1E	ES1G	ES1J	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V_{RRM}	50	100	150	200	300	400	600	V
最大均方根电压 Maximum RMS voltage	V_{RMS}	35	70	105	140	210	280	420	V
最大直流阻断电压 Maximum DC blocking voltage	V_{DC}	50	100	150	200	300	400	600	V
最大正向平均整流电流 Maximum average forward rectified current	$I_{F(AV)}$	1.0							A
峰值正向浪涌电流 8.3ms单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I_{FSM}	30							A
典型热阻 Typical thermal resistance	$R_{\theta JA}$	50							°C/W
工作结温和存储温度 Operating junction and storage temperature range	T_J, T_{STG}	-50 --- +150							°C

电特性 TA = 25°C 除非另有规定。

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	ES1A	ES1B	ES1C	ES1D	ES1E	ES1G	ES1J	单位 Unit	
最大正向电压 $I_F = 1.0A$ Maximum forward voltage	V_F	0.95			1.25		1.7		V	
最大反向电流 TA=25°C Maximum reverse current TA=100°C	I_R	5.0			100					μA
最大反向恢复时间 $I_F=0.5A, I_R=1.0A, I_{RR}=0.25A$ MAX. Reverse Recovery Time	t_{rr}	35								nS
典型结电容 $V_R = 4.0V, f = 1MHz$ Type junction capacitance	C_j	15								pF

特性曲线 Characteristic Curves

